


Dlink DSL-2751

Please follow the below steps to configure Dlink DSL-2751 modem

- Establish a connection between the device and the router via network cable or Wi-Fi (if there's a WIFI password you have to check bottom of the router. If you turn the router over, you should see a sticker, and one of the pieces of information should say something like "Wi-Fi Password" or "WPA passcode.")
- Open a browser and type 192.168.1.1 in the address bar
- You will be prompted to enter Username: admin and Password: admin

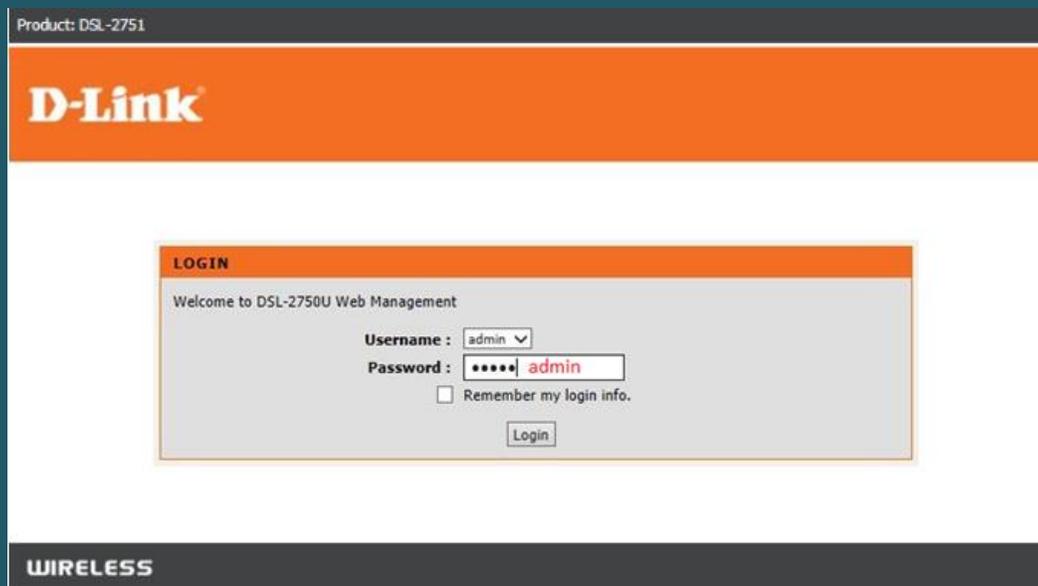

The screenshot displays the D-Link DSL-2751 Web Management interface. At the top, it says "Product: DSL-2751" and features the D-Link logo. The main content area is titled "LOGIN" and includes a "Welcome to DSL-2750U Web Management" message. Below this, there are input fields for "Username" (set to "admin") and "Password" (set to "admin"). A checkbox labeled "Remember my login info." is present, and a "Login" button is at the bottom of the form. The footer of the page contains the word "WIRELESS".

- After logging in , Click Setup and Internet Setup then click Setup ADSL Interface

Product: DSL-2751



↓

DSL-2751	SETUP	ADVANCED	MAINTENANCE	STATUS
Internet Setup ←	INTERFACE SETUP			
Wireless Setup	There are 2 ways to setup your internet. You can use ADSL to configure the internet or you can assign one of the Ethernet ports as a WAN port to internet.			
LAN Setup	ADSL INTERFACE			
Time and Date	Use ADSL interface to setup your internet			
Parental Control	Setup ←			
IPv6 Setup	ETHERNET WAN INTERFACE			
USB Setup	Assign one of the Ethernet ports as a WAN port to internet.			
Logout	Setup			
				

- Under ADSL Setup select Manual Setup then click Setup Wizard

Product: DSL-2751



↓

DSL-2751	SETUP	ADVANCED	MAINTENANCE	STATUS
Internet Setup ←	ADSL SETUP			
Wireless Setup	If you are configuring this device for the first time, D-Link recommends that you click Setup Wizard button, and follow the instructions on screen. If you wish to modify or configure the ADSL settings manually, tick Manual Setup to enable the ADSL Connection Setup.			
LAN Setup	Setup Wizard			
Time and Date	↑			
Parental Control	<input checked="" type="checkbox"/> Manual Setup			
IPv6 Setup	↑			
USB Setup				
Logout				
				

- Select PPPoE/PPPoA as an ISP connection type

Product: DSL-2751

D-Link

DSL-2751 // **SETUP** ADVANCED MAINTENANCE STATUS

Internet Setup ← Wireless Setup LAN Setup Time and Date Parental Control IPv6 Setup USB Setup Logout

MANUAL ADSL CONNECTION SETUP

Please select the appropriate option to connect to your ISP.

PPPoE/PPPoA Choose this option if your ISP uses PPPoE/PPPoA. (For most DSL users).

Dynamic IP Address Choose this option if your ISP uses Dynamic IP Address over DSL.

Static IP Address Choose this option if your ISP uses Static IP assignments.

Bridge Choose this option if your ISP uses Bridge.

Enable IPv6 for this service

- Type ADSL Username and Password and Select PPPoE LLC/Snap-Bridging as connection type
- Make sure Obtain DNS server address automatically is selected

PPPOE/PPPOA INTERNET CONNECTION TYPE :

Enter the information provided by your Internet Service Provider (ISP).

Username : D?????@idm.net.lb ←

Password : ***** ←

Service Name :

Static IP :

Connection Type : PPPoE LLC/Snap-Bridging ↓ ←

MTU :

Idle Time Out : Minutes (0 = Always On)

PPP IP Extension :

DNS AND DEFAULT GATEWAY:

Obtain DNS server address automatically
WAN Interface selected:

Use the following DNS server addresses
Preferred DNS server:

Alternate DNS server:

- Type VPI and VCI , VPI should be 0 if DSP is Ogero and 8 if DSP is GDS while VCI should be 35 then click Apply

IPV6 DNS AND DEFAULT GATEWAY:

Obtain IPV6 DNS server address automatically
IPV6 WAN Interface selected:

Use the following IPV6 DNS server addresses
Preferred IPV6 DNS server:
Alternate IPV6 DNS server:

Default IPV6 Gateway interface
Selected IPV6 Gateway Interface:

VPI : ←

VCI : ←

Enable NAT :

Enable FIREWALL :

Enable IGMP Proxy :

Enable MLD Multicast Proxy :

Enable VLAN :

→

- Click Setup then go to Wireless Setup and click Wireless Connection Setup Wizard

DSL-2751	SETUP	ADVANCED	MAINTENANCE	STATUS
Internet Setup	WIRELESS SETUP			
Wireless Setup	There are 2 ways to setup your wireless connection. You can use the Wireless Connection Setup wizard or you can manually configure the connection.			
LAN Setup	WIRELESS CONNECTION SETUP WIZARD			
Time and Date	The following Web-based wizard is designed to assist you for your wireless network setup and wireless device connection.			
Parental Control	Wireless Connection Setup Wizard			
IPv6 Setup	Note: Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.			
USB Setup	ADD WIRELESS DEVICE WITH WPS(WI-FI PROTECTED SETUP) WIZARD			
Logout	According to the Wi-Fi 802.11n specification, Wi-Fi Protected Setup is not fully supported with WEP security mode. We will disable the Wi-Fi Protected Setup if you chose WEP security mode.			
 Internet Online	Add Wireless Device with WPS			
English	MANUAL WIRELESS CONNECTION OPTIONS			
Reboot	If you would like to configure the Internet settings of your new D-Link Router manually, then click on the button below.			
	Manual Wireless Connection Setup			

- Make sure Wireless Network is enabled then type Wi-Fi name in Wireless Network Name SSID
- In Pre-Shared Key type Wi-Fi password then click Next (safest passwords are long and contain at least 8 digits of mixed letters, and numbers)

WELCOME TO THE D-LINK WIRELESS SECURITY SETUP WIZARD

Your wireless network is enabled by default. You can simply uncheck the below checkbox to disable wireless.

Enable Your Wireless Network 

Give your network a name, using up to 32 characters.

Wireless Network Name (SSID) :

D-Link 

(1-32 characters)

Set your wireless encryption mode. We will automatically assign a security key to prevent outsiders from accessing your wireless network, the router will automatically assign a security key to your wireless network.

Wireless Security Mode : **Auto (WPA or WPA2)**

Pre-Shared Key :

4nl9qymzk 

(8-63 characters, such as a~z, A~Z, or 0~9.)

Note: We provide user a random pre-shared key by automatically. You can also set it manually if you do not prefer the key we generate. 

Prev

Next

Cancel

- In Wireless configuration summary page click Save

WELCOME TO THE D-LINK WIRELESS SECURITY SETUP WIZARD

Please enter the following settings in the wireless device that you are adding to your wireless network and keep a note of it for future reference.

Wireless Status : Enabled

Network Name(SSID) : D-Link

Wireless Security Mode : Auto(WPA or WPA2)

Network Key : 4nl9qymzk 

Prev

Save

Cancel