

Edimax AR-7284WnA

- Establish a connection between the device and the router via network cable or Wi-Fi (if Wi-Fi is protected by a password you have to check label on the bottom of modem)
- Open your web browser and type the default IP Address 192.168.2.1 in the address bar
- You will be prompted to enter Username: admin and Password: 1234

Input username and password

UserName

Password

- Go to Setup on the top menu and click Wizard under Setup then Setup Wizard

EDIMAX NETWORKING PEOPLE TOGETHER

Setup Advanced Management Status Help

Setup

Wizard ← 2

Internet Setup

Wireless

Local Network

Time and Date

Logout

SETTING UP YOUR INTERNET

1

There are two ways to set up your Internet connection. You can use the Web-based Internet Connection Setup Wizard or you can manually configure the connection.

Please make sure you have your ISP's connection settings first if you choose manual setup.

INTERNET CONNECTION WIZARD

You can use this wizard for assistance and quick connection of your new Router to the Internet. You will be presented with step-by-step instructions in order to get your Internet connection up and running. Click the button below to begin.


← 3

Note: Before launching the wizard, please ensure you have correctly followed the steps outlined in the Quick Installation Guide included with the router.

- There are 4 steps to configure the modem , click Next to start configuration



- You can either enable automatic synchronization with internet time server or keep it disabled and click Next

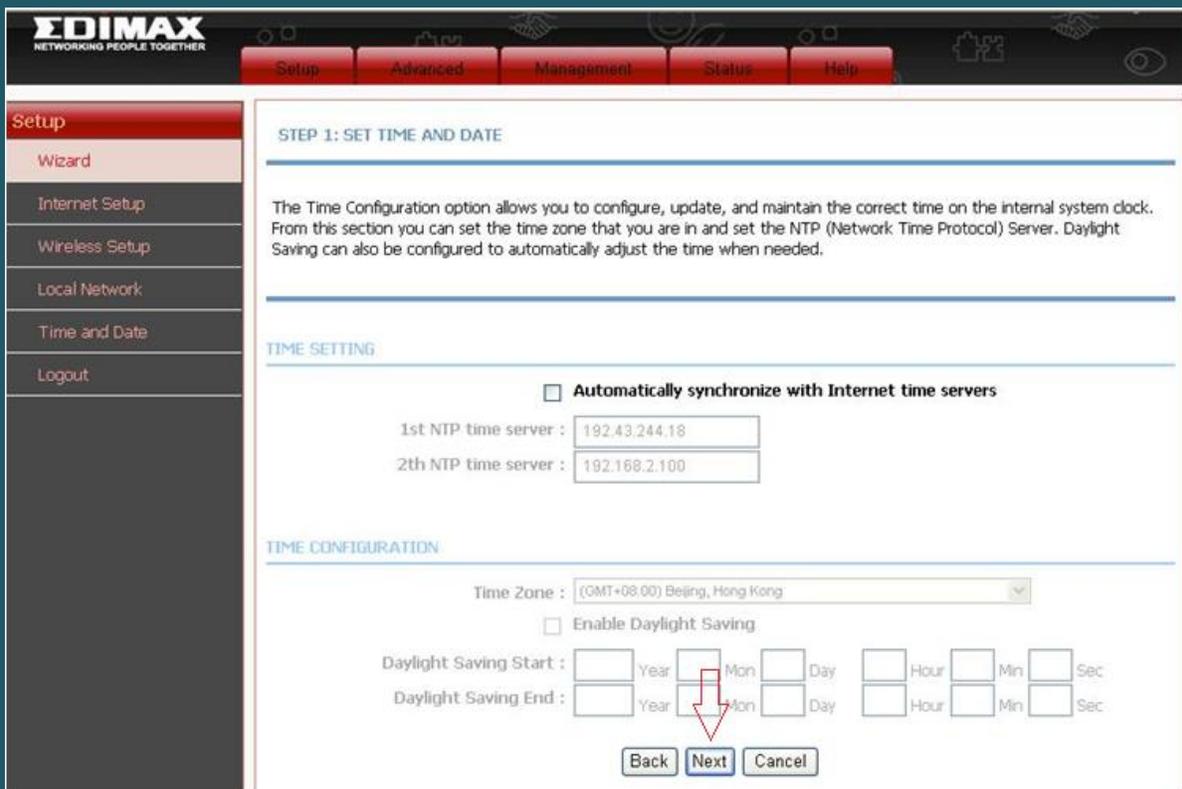

- Select PPPoE as Protocol and LLC as Encapsulation Mode
- Type VPI and VCI , VPI should be 0 in case DSP is Ogero and 8 in case DSP is GDS while VCI should be 35
- Type ADSL Username and Password then confirm Password and click Next

EDIMAX
NETWORKING PEOPLE TOGETHER

Setup Advanced Management Status Help

Setup

Wizard

Internet Setup

Wireless Setup

Local Network

Time and Date

Logout

STEP 2: SETUP INTERNET CONNECTION

Please select your ISP (Internet Service Provider) from the list below.

Protocol : PPPoE

Encapsulation Mode : LLC

VPI : 0 (0-255)

VCI : 35 (32-65535)

Search Available PVC : Scan

PPPoE/PPPoA

Please enter your Username and Password as provided by your ISP (Internet Service Provider). Please enter the information exactly as shown taking note of upper and lower cases. Click "Next" to continue.

Username : D?????@idm.net.lb

Password :

Confirm Password :

Back Next Cancel

- Make sure Wireless Network is enabled and in Wireless Network Name (SSID) type wireless name
- Visibility Status should be Visible and Choose WPA2-PSK as Security Level
- In WPA2 Pre-Shared Key type wireless password then click Next

STEP 3: CONFIGURE WIRELESS NETWORK

Your wireless network is enabled by default. You can simply uncheck it to disable it and click "Next" to skip configuration of wireless network.

Enable Your Wireless Network :

Your wireless network needs a name so it can be easily recognized by wireless clients. For security purposes, it is highly recommended to change the pre-configured network name.

Wireless Network Name (SSID) :

Select "Visible" to publish your wireless network and SSID can be found by wireless clients, or select "Invisible" to hide your wireless network so that users need to manually enter SSID in order to connect to your wireless network.

Visibility Status : Visible Invisible

In order to protect your network from hackers and unauthorized users, it is highly recommended you choose one of the following wireless network security settings.

None *Security Level* **Best**

None WEP WPA-PSK WPA2-PSK

Security Mode:WPA2-PSK
Select this option if your wireless adapters support WPA2-PSK.

Now, please enter your wireless security key :

WPA2 Pre-Shared Key :

(8-63 characters, such as a~z, A~Z, or 0~9, i.e. '%Fortress123&')

Note: You will need to enter the same key here into your wireless clients in order to enable proper wireless connection.

- Review Setup Summary and click Apply to save configuration

STEP 4: COMPLETED AND RESTART

Setup complete. Click "Back" to review or modify settings.

If your Internet connection does not work after restart, you can try the Setup Wizard again with alternative settings or use Manual Setup instead if you have your Internet connection details as provided by your ISP.

SETUP SUMMARY

Time Settings :	1
NTP Server 1 :	192.43.244.18
NTP Server 2 :	192.168.2.100
Time Zone :	+00:00
Daylight Saving Time :	0
VPI / VCI :	0/5
Protocol :	PPPoE
Connection Type :	LLC
Username :	ttt
Password :	ttt
Wireless Network Name (SSID) :	edimax_0
Visibility Status :	0
Encryption :	WPA
Pre-Shared Key :	12345678
WEP Key :	