



## LB-link BL WMR8152

Please follow the below steps to configure LB-link BL WMR8152 modem

- Establish a connection between the device and the router via network cable or Wi-Fi (if there's a WIFI password you have to check bottom of the router. If you turn the router over, you should see a sticker, and one of the pieces of information should say something like "Wi-Fi Password" or "WPA passcode.")
- Open a browser and type 192.168.1.1 in the address bar

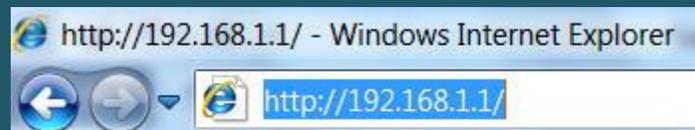

- You will be prompted to enter Username: admin and Password: admin

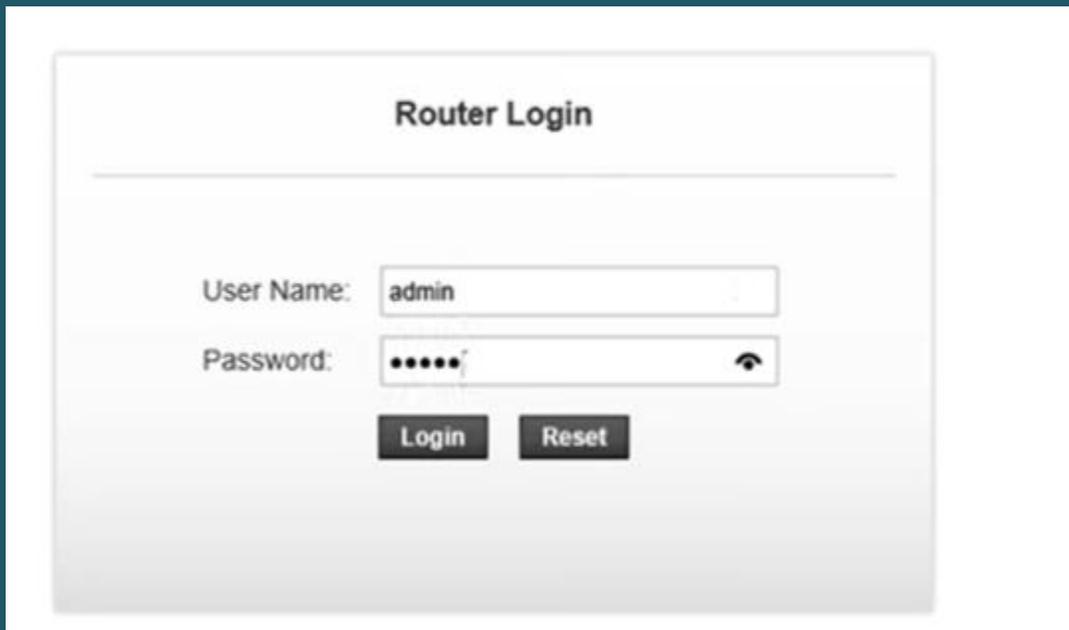A screenshot of a web-based "Router Login" page. The page has a title "Router Login" at the top. Below the title is a horizontal line. There are two input fields: "User Name:" with the text "admin" entered, and "Password:" with masked characters "\*\*\*\*\*" and a small eye icon to the right. Below the input fields are two buttons: "Login" and "Reset".

- After logging in Click Wizard and first step should be WAN connection setting
- Type VPI and VCI , VPI should be 0 in case DSP is Ogero and 8 in case DSP is GDS while VCI should be 35
- Choose LLC/SNAP as Encapsulation and PPPoE as connection mode
- Make sure IP Protocol is IPV4 then type ADSL username and password
- Keep other default settings unchanged and click Next

**LB-LINK**

Status **WAN** Setup Advanced Service Firewall Maintenance

**Wizard**

Wizard

**Fast Config**

The wizard will help you do some basic configurations step by step.  
Step 1: WAN Connection Setting  
Step 2: WLAN Connection Setting  
Step 3: Save Setting

Step 1: WAN Connection Setting: Please select the wan connection mode

VPI/VC: VPI: 0 (0-255) VCI: 35 (32-65535)

Encapsulation:  LLC/SNAP  VC-Mux

Bridge

IPoE

Connection Mode:  PPPoE

PPPoA

1483 Routed

IP Protocol: Ipv4

PPP Settings: Username: D??????@idm.net.lb Password: ●●●●●●

Default Route:  Enable  Disable

DNS Settings:  Attain DNS Automatically

Set DNS Manually :

Next

- In SSID Textbox type Wireless Name
- Select WPA2 Mixed as Encryption and Personal (Pre-Shared Key) as WPA Authentication Mode
- Select Passphrase as Pre-Shared Key Format then type Wireless password in Pre-Shared Key textbox and click Next (safest passwords are long and contain at least 8 digits of mixed letters, and numbers)

**B-LINK**

Status **Wizard** Setup Advanced Service Firewall Maintenance

**Fast Config**

Step 2: Wireless Fast Settings: Please config basic settings about wireless.

WLAN:  Enable  Disable

Band: 2.4 GHz (B+G+N)

SSID: B-LINK\_B4600F

Encryption: WPA2 Mixed

WPA Authentication Mode:  Enterprise (RADIUS)  Personal (Pre-Shared Key)

Pre-Shared Key Format: Passphrase

Pre-Shared Key:

Prev Next

- When Fast Configuration summary page opens , review entered settings and click Apply Changes

Status **Wizard** Setup Advanced Service Firewall Maintenance

**Fast Config**

Step 3: Save Settings If you need finish settings in the fast config, please click "Apply Changes", otherwise please click "Cancel" or "Prev".

Settings as follow:

VPI:	0
VCI:	35
Encapsulation:	LLC/SNAP
Channel Mode:	PPPoE
IP Protocol:	Ipv4
ppp username:	
ppp password:	
DNS Setting:	DNS Automatically
WLAN :	Enable

Prev Apply Changes Cancel