



TP-Link TD-W8960N


- Establish a connection between the device and the router via network cable or Wi-Fi , If Wi-Fi is protected by a password look at sticker on bottom side
- Open your web browser and type the default IP Address 192.168.1.1 in the address bar

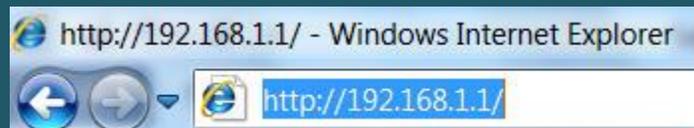


- You should now see the router login page with 2 text fields where you can type a username and a password
- The default username is **admin** and default password is **admin**

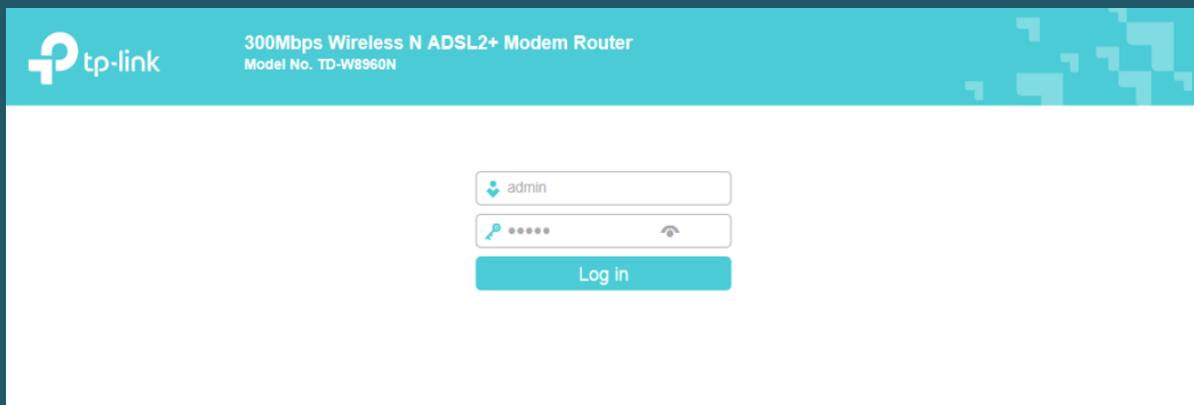

- After logging in , Click Quick Setup then click Next

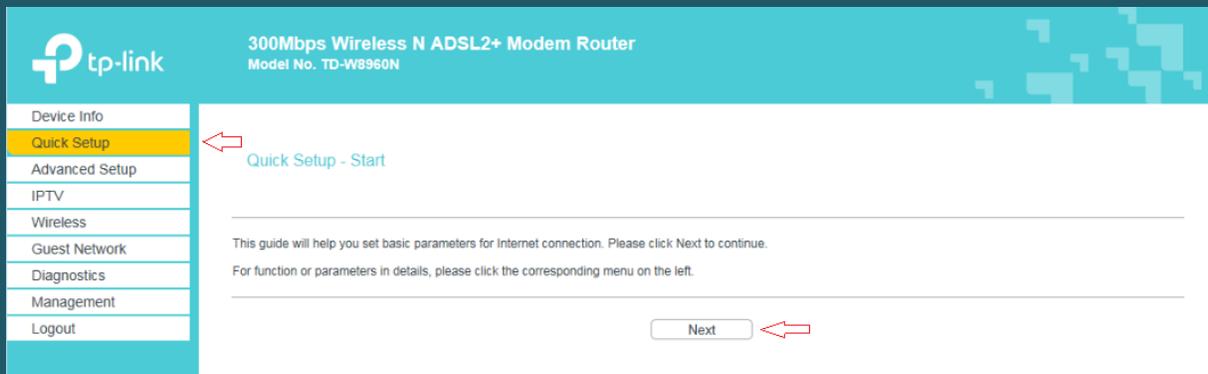

- Choose ADSL WAN as WAN type then click Next

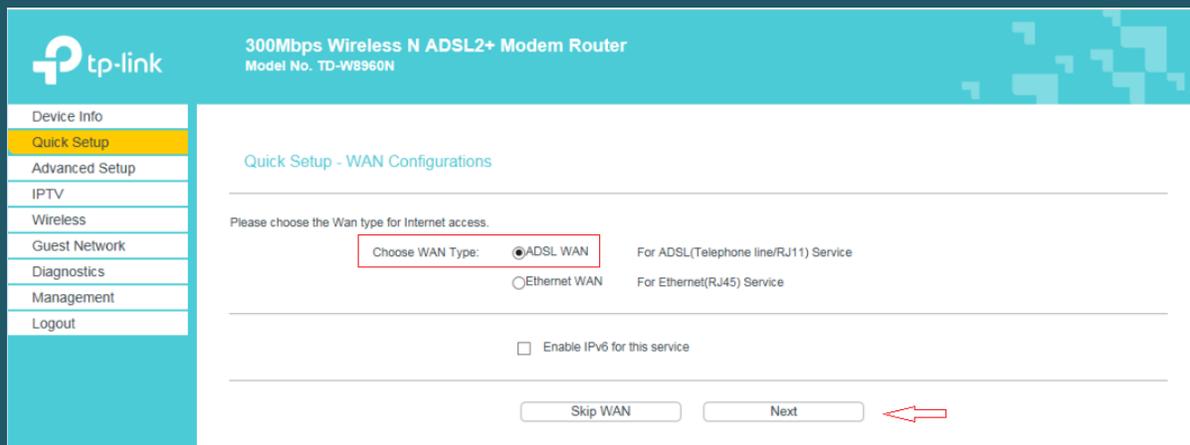

- In WAN Configuration page select Other for Country and ISP
- Type VPI and VCI , VPI should be 0 in case DSP is Ogero and 8 in case DSP is GDS while VCI should be 35
- Select PPPoE (PPP Over Ethernet) as WAN Link Type
- Type ADSL Username and Password then click Next

tp-link 300Mbps Wireless N ADSL2+ Modem Router
Model No. TD-W8960N

Device Info
Quick Setup
Advanced Setup
IPTV
Wireless
Guest Network
Diagnostics
Management
Logout

Quick Setup - WAN Configurations

Country: Other
ISP: Other
VPI/VCI: 8 / 35 ([0-255] / [32-65535])
Encapsulation Mode: LLC/SNAP-BRIDGING (optional)

WAN Link Type: PPPoE(PPP over Ethernet)
PPP Username: D?????@idm.net.lb
PPP Password: *****

PPPoE Service Name: (optional)
MTU (bytes): 1492 (optional)

Back Skip WAN Next

- Make sure Wireless adapter is enabled then in Wireless Network Name SSID type the name of wireless
- Select WPA2-Personal as Network Authentication mode then type wireless password and click Next (safest passwords are long and contain at least 8 digits of mixed letters, and numbers)

tp-link 300Mbps Wireless N ADSL2+ Modem Router
Model No. TD-W8960N

Device Info
Quick Setup
Advanced Setup
IPTV
Wireless
Guest Network
Diagnostics
Management
Logout

Quick Setup - Wireless Configurations

Enable Wireless: ←

You can configure SSID and your WLAN Authentication type.

Wireless Network Name: WindWiFi_2A8A (Also called SSID) ←

In order to protect your network from hackers and unauthorized users, it is highly recommended you choose one of the following wireless network security settings.

Network Authentication: WPA2-Personal (best/recommended) ←

Wireless Network Key: •••••••• (Also called WPA Pre-Shared Key) ←
(You can enter ASCII characters between 8 and 63 characters or 8 to 64 Hexadecimal characters.)

Back Skip Wi-Fi Next ←

- Check Summary of WAN Configurations then click confirm

 **300Mbps Wireless N ADSL2+ Modem Router**
Model No. TD-W8960N

Device Info
Quick Setup
Advanced Setup
IPTV
Wireless
Guest Network
Diagnostics
Management
Logout

Quick Setup - Summary

WAN Configurations

WAN Type:	ADSL WAN
Layer2 Information:	8/35 LLC/SNAP-BRIDGING
WAN Link Type:	PPPoE
PPP Username:	-
PPP Password:	password
PPP MTU:	1492

Note1: Some WAN Connection(s) or Layer2 interface(s) may be replaced by new one!
Note2: The Virtual Server Rules of some WAN Connection(s) may be deleted!

Wi-Fi Configurations

Wireless Network Name:	WindWIFI_2A8A
Network Authentication:	WPA2-Personal
Wireless Network Key:	••••••

