



TP-Link TD-W8968 V1

- Establish a connection between the device and the router via network cable or Wi-Fi , If Wi-Fi is protected by a password look at sticker on bottom side
- Open your web browser and type the default IP Address 192.168.1.1 in the address bar

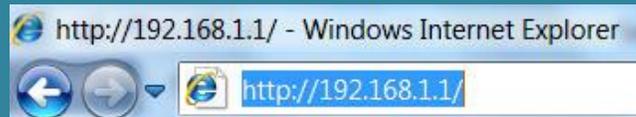


- You should now see the router login page with 2 text fields where you can type a username and a password
- The default username is **admin** and password is **admin**

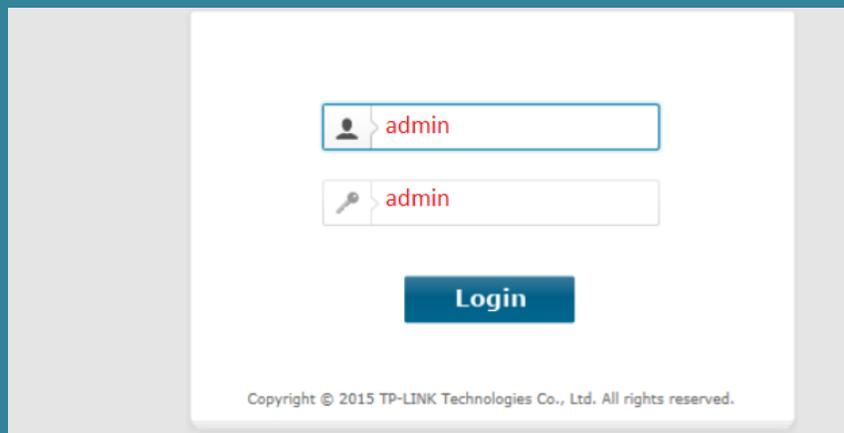


- After logging in , Click Quick Setup then click Next




- Select ADSL Modem Router as Operation Mode then click Next

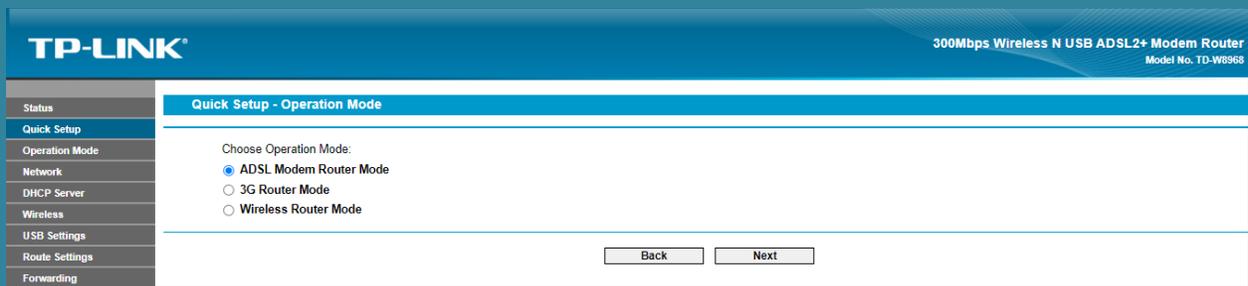

- Type VPI and VCI , VPI Should be 0 in case DSP is Ogero and 8 in case DSP is GDS while VCI should be 35 then click Next

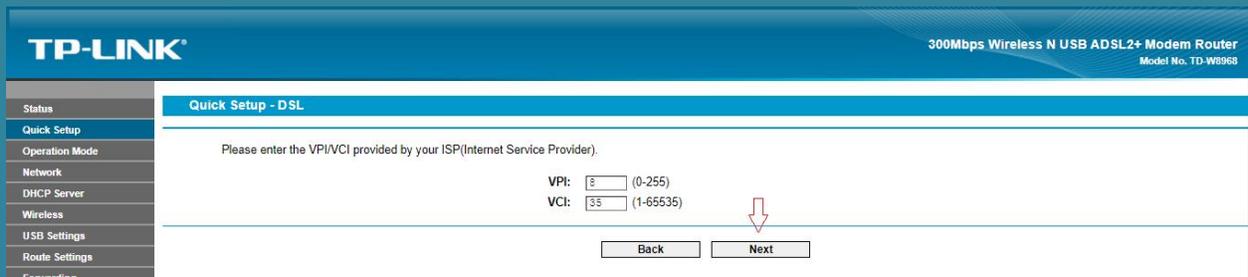


- Select PPPoE as ADSL Connection Type then click Next

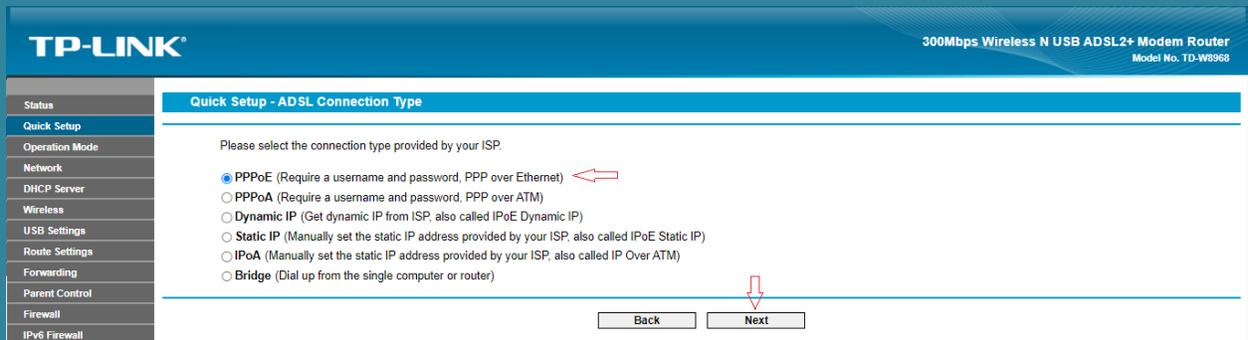

- Type ADSL Username and Password then click Next




- Keep 3G disabled and click Next

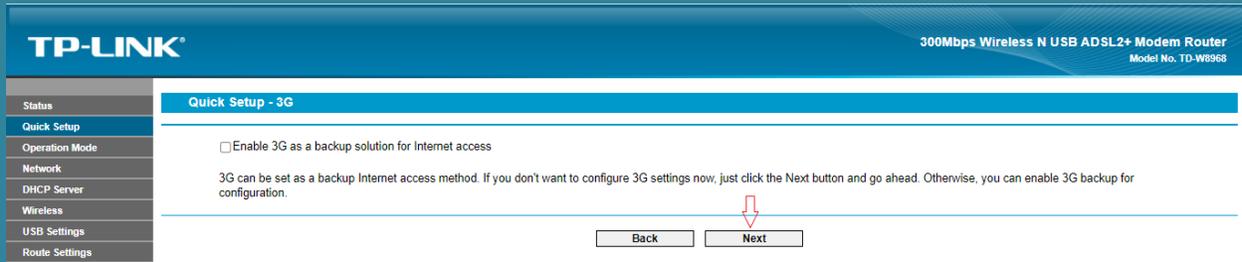


The screenshot shows the 'Quick Setup - 3G' page of the TP-LINK router. The page title is 'Quick Setup - 3G'. There is a checkbox labeled 'Enable 3G as a backup solution for Internet access' which is currently unchecked. Below the checkbox, there is a paragraph of text: '3G can be set as a backup Internet access method. If you don't want to configure 3G settings now, just click the Next button and go ahead. Otherwise, you can enable 3G backup for configuration.' At the bottom of the page, there are two buttons: 'Back' and 'Next'. A red arrow points to the 'Next' button.

- In Wireless Network Name SSID type Wi-Fi name
- Select WPA-PSK/WPA2-PSK as Security mode then type wireless password in the Textbox and click Next (safest passwords are long and contain at least 8 digits of mixed letters, and numbers)

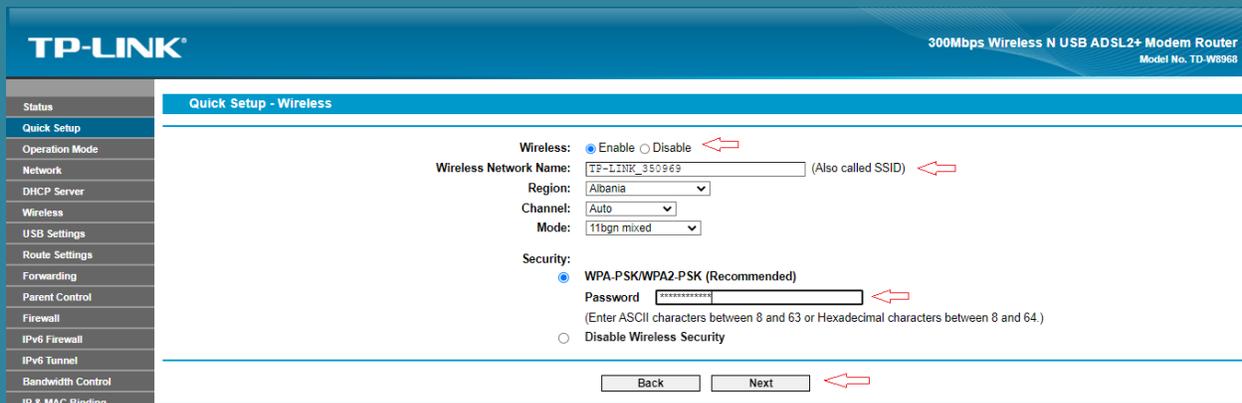

The screenshot shows the 'Quick Setup - Wireless' page of the TP-LINK router. The page title is 'Quick Setup - Wireless'. There are several configuration options: 'Wireless' is set to 'Enable' (indicated by a red arrow); 'Wireless Network Name' is 'TP-LINK_350969' (indicated by a red arrow); 'Region' is 'Albania'; 'Channel' is 'Auto'; 'Mode' is '11bgn mixed'; 'Security' is 'WPA-PSK/WPA2-PSK (Recommended)'; and 'Password' is '*****' (indicated by a red arrow). Below these options, there are two buttons: 'Back' and 'Next'. A red arrow points to the 'Next' button.

- Review configuration Summary then click Save

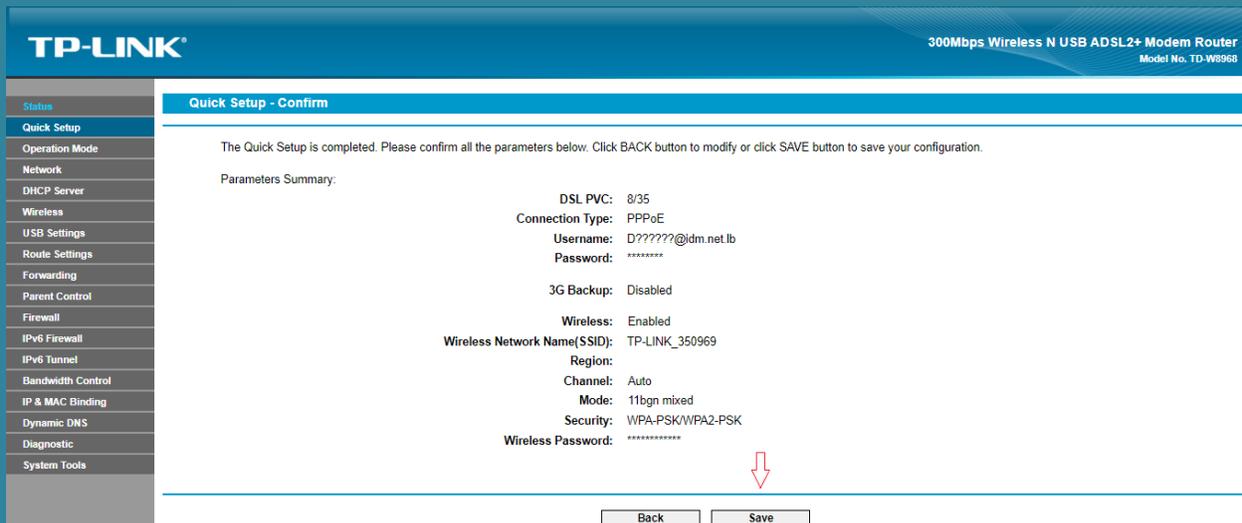

The screenshot shows the 'Quick Setup - Confirm' page of the TP-LINK router. The page title is 'Quick Setup - Confirm'. The text reads: 'The Quick Setup is completed. Please confirm all the parameters below. Click BACK button to modify or click SAVE button to save your configuration.' Below this, there is a 'Parameters Summary' section with the following details: DSL PVC: 8/35; Connection Type: PPPoE; Username: D?????@dm.net.lb; Password: *****; 3G Backup: Disabled; Wireless: Enabled; Wireless Network Name(SSID): TP-LINK_350969; Region: Albania; Channel: Auto; Mode: 11bgn mixed; Security: WPA-PSK/WPA2-PSK; Wireless Password: *****. At the bottom of the page, there are two buttons: 'Back' and 'Save'. A red arrow points to the 'Save' button.

- At the end of Setup Wizard click Finish

TP-LINK 300Mbps Wireless N USB ADSL2+ Modem Router
Model No. TD-W8968

Quick Setup - Complete

Setup Status:

Operation Mode Configuring:	Success
WAN Connection Releasing:	Success
WAN Connection Configuring:	Success
3G Connection Configuring:	Success
Gateway and DNS Configuring:	Success
Wi-Fi Configuring:	Success

Quick Setup has completed. Please click FINISH button to exit.
Note: If the Modem Router still can not connect to the Internet, please click "Network > WAN Settings" menu on the left to confirm the WAN connection type and mode on the WAN Settings page.


Finish

Navigation Menu: Status, Quick Setup, Operation Mode, Network, DHCP Server, Wireless, USB Settings, Route Settings, Forwarding, Parent Control, Firewall, IPv6 Firewall, IPv6 Tunnel, Bandwidth Control, IP & MAC Binding