


TotoLink ND150 & ND300

- Establish a connection between the device and the router via network cable or Wi-Fi , If Wi-Fi is protected by a password look at sticker on bottom side
- Open your web browser and type the default IP Address 192.168.1.1 in the address bar

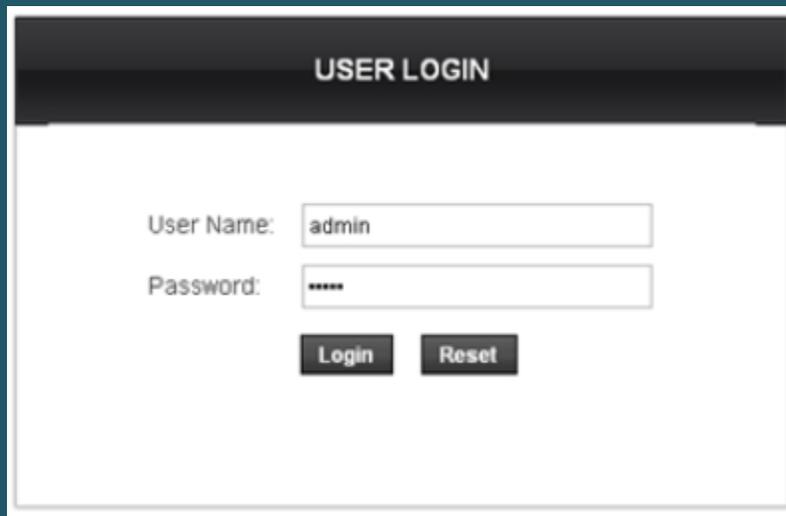

- Enter admin for User Name and Password, both in lower case letters. Then click Login

A screenshot of the "USER LOGIN" page. The page has a dark header with the text "USER LOGIN". Below the header, there are two input fields: "User Name:" containing the text "admin" and "Password:" containing "*****". At the bottom of the form are two buttons: "Login" and "Reset".

- Click Easy Setup to start the wizard then Select English Language and click Next



- In ISP setting page select others as country and ISP
- Select PPPoE to be ISP connection type and LLC as Channel Mode
- Type VPI and VCI , VPI should be 0 if DSP is Ogero and 8 if DSP is GDS while VCI should be 35
- In username and password type ADSL credentials then click Next

Easy Setup1 – ISP Setting

Country: Others

ISP: Others

ISP Connection Type: PPPoE

Channel Mode: LLC

VPI: 0

VCI: 35

Username: D??????@idm.net.lb

Password: *****

Connection Type: Continuous

PREV NEXT

- In Wireless Settings & Security page make sure Broadcast SSID is enabled
- In SSID Textbox type wireless Name
- Select WPA2 Mixed as encryption and Personal (Pre-Shared Key) as Authentication type
- In Pre-Shared Key type wireless password then click Apply (safest passwords are long and contain at least 8 digits of mixed letters, and numbers)

Easy Setup2 – Wireless Setting & Security

Broadcast SSID: Enable Disable

SSID: TOTOLINK ND150

Encryption: WPA2 Mixed

Authentication Type: Personal (Pre-Shared Key)

Pre-Shared Key: (8-63 ASCII characters or 64 hexadecimal characters)

PREV APPLY

- When you see Quick Start complete click Close

