


## Dlink DSL-2730U

- Establish a connection between the device and the router via network cable or Wi-Fi
- Open a browser and type 192.168.1.1 in the address bar
- You will be prompted to enter Username: admin and Password: admin

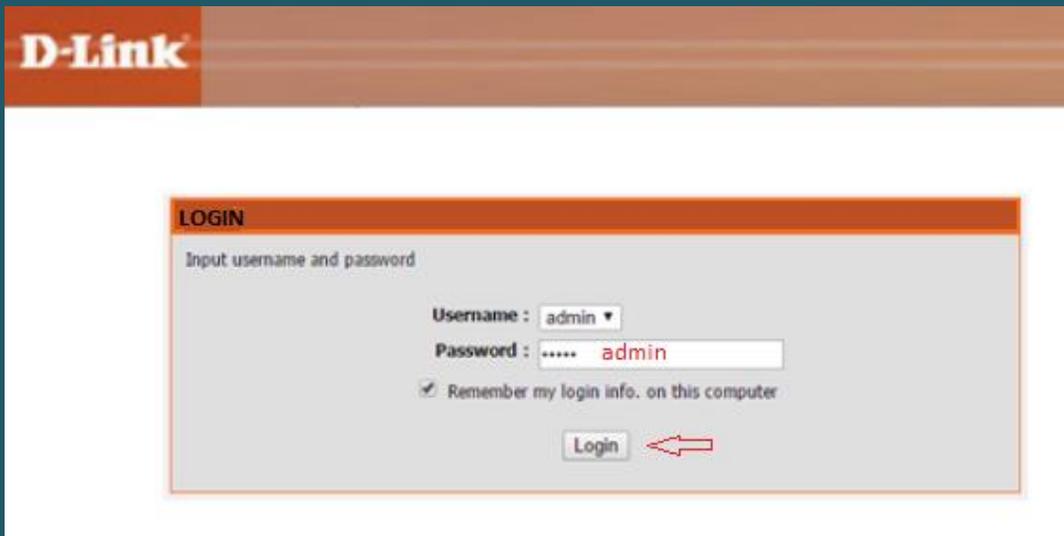

**D-Link**

**LOGIN**

Input username and password


Username : admin ▼

Password : ..... admin

Remember my login info. on this computer

Login

- After logging in, Device Info page will be displayed.

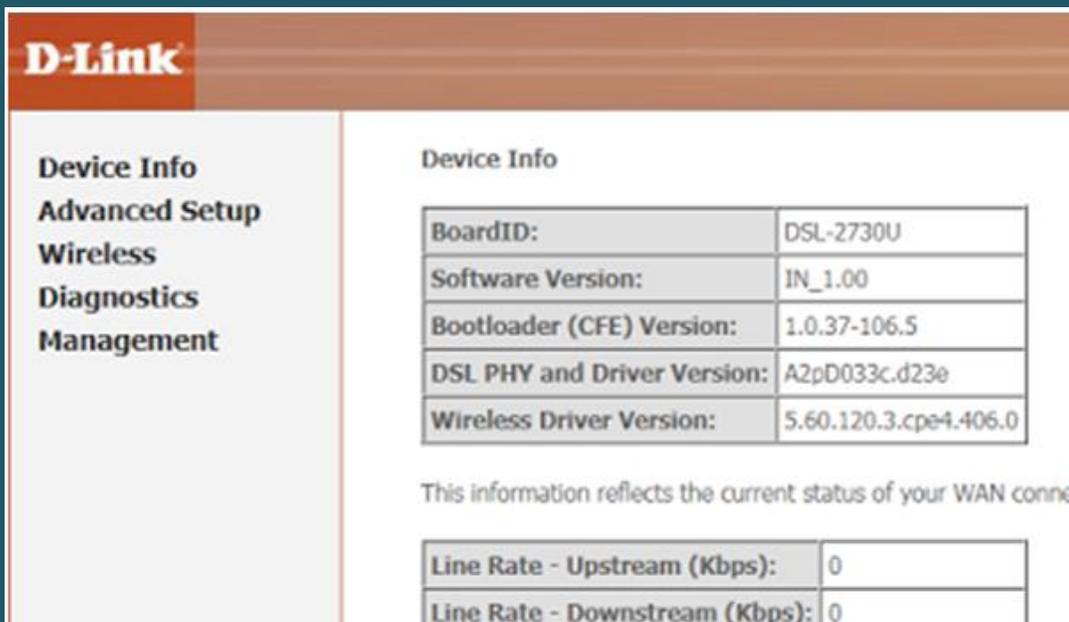

**D-Link**

**Device Info**

Advanced Setup  
Wireless  
Diagnostics  
Management

**Device Info**

BoardID:	DSL-2730U
Software Version:	IN_1.00
Bootloader (CFE) Version:	1.0.37-106.5
DSL PHY and Driver Version:	A2pD033c.d23e
Wireless Driver Version:	5.60.120.3.cpe4.406.0

This information reflects the current status of your WAN connection

Line Rate - Upstream (Kbps):	0
Line Rate - Downstream (Kbps):	0

- Expand Wireless then click Basic and make sure wireless is enabled
- In SSID textbox type new Wireless Name then click Apply/Save

**D-Link**

**Device Info**  
**Advanced Setup**  
**Wireless**  
**Basic** ←  
**Security**  
**MAC Filter**  
**Wireless Bridge**  
**Advanced**  
**Station Info**  
**Diagnostics**  
**Management**

**Wireless -- Basic**

This page allows you to configure basic features of the wireless LAN interface. You can enable or disable the wireless network name (also known as SSID) and restrict the channel set based on country requirements. Click "Apply/Save" to configure the basic wireless options.

Enable Wireless ←  
 Hide Access Point  
 Clients Isolation  
 Enable Wireless Multicast Forwarding (WMF)

SSID:  ←  
BSSID: 00:22:33:44:55:67  
Country:   
Max Clients:

**Wireless - Guest/Virtual Access Points:**

Enabled	SSID	Hidden	Isolate Clients	Enable WMF	Max Clients	BSSID
<input type="checkbox"/>	<input type="text" value="DLink0_Guest1"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="text" value="16"/>	N/A
<input type="checkbox"/>	<input type="text" value="DLink0_Guest2"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="text" value="16"/>	N/A
<input type="checkbox"/>	<input type="text" value="DLink0_Guest3"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="text" value="16"/>	N/A

←

- Under Wireless , click Security
- Under Manual Setup AP , select the predefined SSID and Make sure Network Authentication is WPA-Personal or WPA2-pesonal
- In WPA/WAPI Passphrase type new Wi-Fi Password and click Apply/Save (safest passwords are long and contain at least 8 digits of mixed letters, and numbers)

- Device Info
- Advanced Setup
- Wireless
  - Basic
  - Security ←
  - MAC Filter
  - Wireless Bridge
  - Advanced
- Station Info
- Diagnostics
- Management

### Wireless -- Security

This page allows you to configure security features of the wireless LAN interface.  
You may setup configuration manually  
OR  
through WiFi Protected Setup(WPS)

#### WPS Setup

Enable WPS

#### Manual Setup AP

You can set the network authentication method, selecting data encryption, specify whether a network key is required to authenticate to this wireless network and Click "Apply/Save" when done.

Select SSID:  ←

Network Authentication:   ←

WPA/WAPI passphrase:  [Click here to display](#) ←

WPA Group Rekey Interval:

WPA/WAPI Encryption:

←