


## Kasda KW5818B

- Establish a connection between the device and the router via network cable or Wi-Fi
- Open a browser and type 192.168.1.1 in the address bar
- You will be prompted to enter Username: admin and Password: adslroot

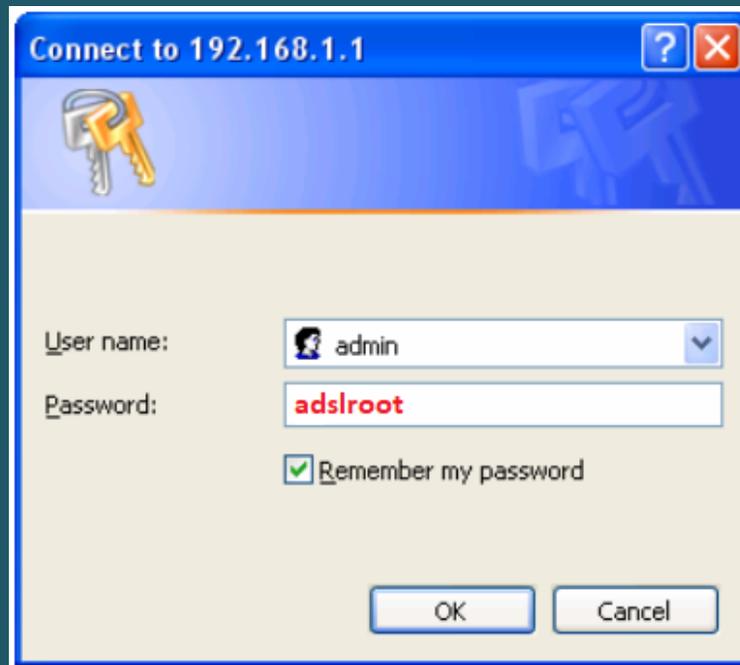

The image shows a Windows-style dialog box titled "Connect to 192.168.1.1". The dialog has a blue header bar with a question mark icon and a close button (X). Below the header is a light blue area with a key icon. The main area is white and contains the following fields and controls:

- User name:** A text box containing "admin" with a dropdown arrow on the right.
- Password:** A text box containing "adslroot" in red text.
- Remember my password
- OK** and **Cancel** buttons at the bottom.

- To Modify Wireless Settings ,expand Wireless then click Basic and make sure wireless is enabled
- In SSID textbox type Wireless Name then click Apply/Save

**Device Info**  
**Advanced Setup**  
**Wireless**  
**Basic** ←  
**Security**  
**MAC Filter**  
**Wireless Bridge**  
**Advanced**  
**Station Info**  
**Diagnostics**  
**Management**

**Wireless -- Basic**

This page allows you to configure basic features of the wireless LAN interface. You can enable or disable the wireless network name (also known as SSID) and restrict the channel set based on country requirements. Click "Apply/Save" to configure the basic wireless options.

Enable Wireless ←  
 Hide Access Point  
 Clients Isolation  
 Enable Wireless Multicast Forwarding (WMF)

SSID:  ←  
 BSSID: 00:22:33:44:55:67  
 Country: UNITED STATES  
 Max Clients:

**Wireless - Guest/Virtual Access Points:**

Enabled	SSID	Hidden	Isolate Clients	Enable WMF	Max Clients	BSSID
<input type="checkbox"/>	Guest1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	16	N/A
<input type="checkbox"/>	Guest2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	16	N/A
<input type="checkbox"/>	Guest3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	16	N/A

←

- Under Wireless , click Security
- Under Manual Setup AP , select the predefined SSID and Make sure Network Authentication is WPA-Personal or WPA2-personal
- In WPA/WAPI Passphrase type Wi-Fi Password and click Apply/Save (safest passwords are long and contain at least 8 digits of mixed letters, and numbers)

**Device Info**  
**Advanced Setup**  
**Wireless**  
**Basic**  
**Security** ←  
**MAC Filter**  
**Wireless Bridge**  
**Advanced**  
**Station Info**  
**Diagnostics**  
**Management**

**Wireless -- Security**

This page allows you to configure security features of the wireless LAN interface. You may setup configuration manually OR through WiFi Protected Setup(WPS)

**WPS Setup**

Enable WPS

**Manual Setup AP**

You can set the network authentication method, selecting data encryption, specify whether a network key is required to authenticate to this wireless network and Click "Apply/Save" when done.

Select SSID:  ←

Network Authentication:   ←

WPA/WAPI passphrase:  [Click here to display](#) ←

WPA Group Rekey Interval:

WPA/WAPI Encryption:

←