



TP-Link TD-W8980


- Establish a connection between the device and the router via network cable or Wi-Fi, If Wi-Fi is protected by a password look at sticker on bottom side
- Open your web browser and type the default IP Address 192.168.1.1 in the address bar




- You should now see the router login page with 2 text fields where you can type a username and a password
- The default username is **admin** and password is **admin**

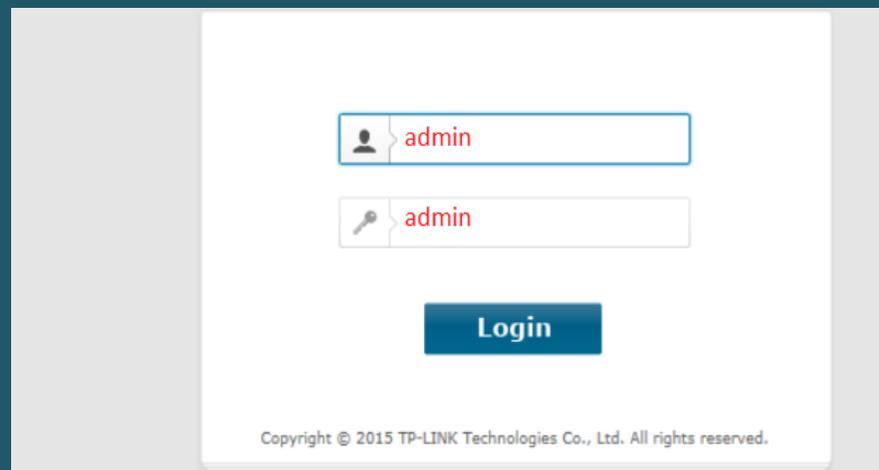


- After logging in , Click Quick Setup then click Next

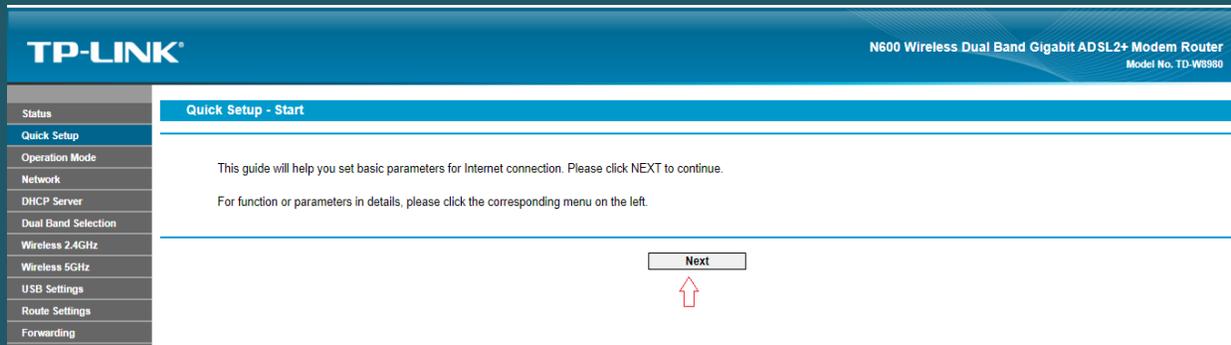

- Type VPI and VCI , VPI Should be 0 in case DSP is Ogero and 8 in case DSP is GDS while VCI should be 35 then click Next

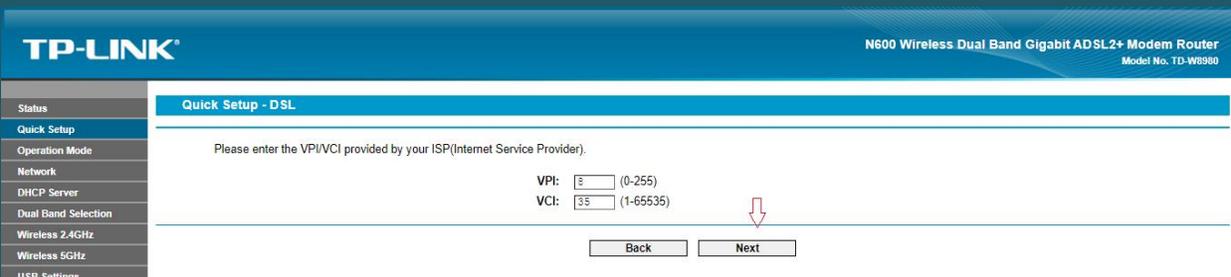

- Select PPPoE as ADSL Connection Type then click Next

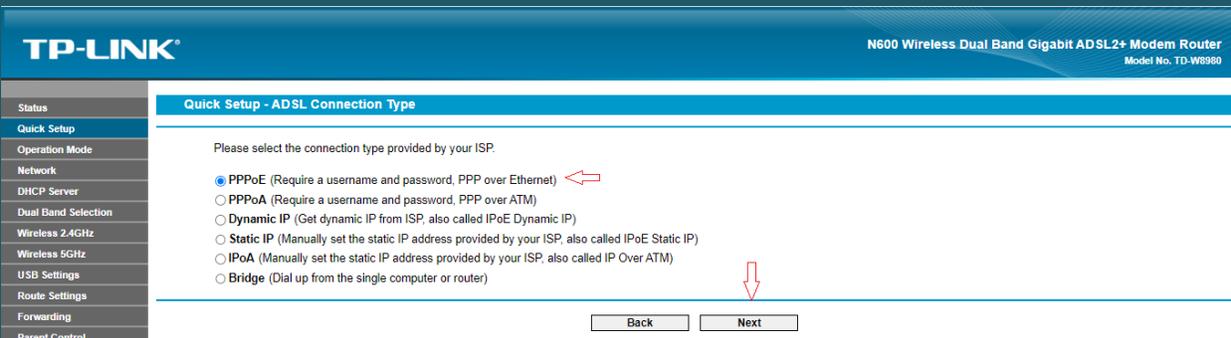

- Type ADSL Username and Password then click Next

TP-LINK N600 Wireless Dual Band Gigabit ADSL2+ Modem Router
Model No. TD-W8980

Quick Setup - PPPoE

Please enter the Username and Password. If you forget them, please consult your ISP.

Username:

Password:

Confirm password:



- In Wireless Network Name SSID type Wi-Fi name
- Select WPA-PSK/WPA2-PSK as Security mode then type wireless password in the Textbox and click Next (safest passwords are long and contain at least 8 digits of mixed letters, and numbers)

TP-LINK N600 Wireless Dual Band Gigabit ADSL2+ Modem Router
Model No. TD-W8980

Quick Setup - Wireless 2.4GHz

Wireless Network Name: (Also called SSID) 

Region:

Channel:

Mode:

Security:

WPA-PSK/WPA2-PSK (Recommended)

Disable Wireless Security

Password: 

(Enter ASCII characters between 8 and 63 or Hexadecimal characters between 8 and 64.)



- Review configuration Summary then click Save

Quick Setup - Confirm

The Quick Setup is completed. Please confirm all the parameters below. Click BACK button to modify or click SAVE button to save your configuration.

Parameters Summary:

DSL PVC:	8/35
Connection Type:	PPPoE
Username:	D?????@dm.net.lb
Password:	*****
Wireless 2.4GHz:	Enabled
Wireless Network Name(SSID):	TP-LINK_2.4GHz_BF50EC
Region:	
Channel:	Auto
Mode:	11bgn mixed
Security:	WPA-PSK/WPA2-PSK
Wireless Password:	12345670
Wireless 5GHz:	Enabled
Wireless Network Name(SSID):	TP-LINK_2.4GHz_BF50EC
Region:	
Channel:	Auto
Mode:	11an mixed
Security:	WPA-PSK/WPA2-PSK
Wireless Password:	12345670

↓

- At the end of Setup Wizard click Finish

Quick Setup - Complete

Setup Status:

Operation Mode Configuring:	Success
WAN Connection Configuring:	Success
Gateway and DNS Configuring:	Success
Wi-Fi Configuring:	Success

Quick Setup has completed. Please click FINISH button to exit.

Note: If the Modem Router still can not connect to the Internet, please click "Network > WAN Settings" menu on the left to confirm the WAN connection type and mode on the WAN Settings page.

↓